

GANDIA Technical information


Reference

GANDÍA_70. Ref. 165 Gloss / Ref. 195 Soft




Bowl depth 200 mm.

Dimensions

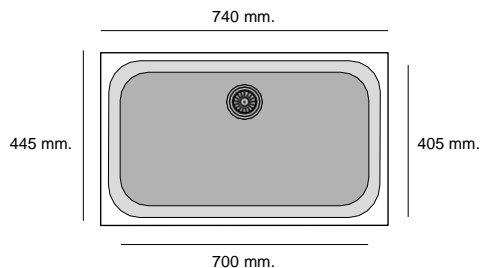


Undermount

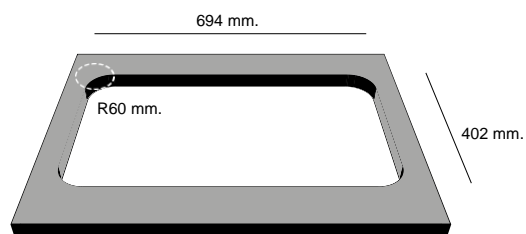

Base cabinet 80 cm.

Inset

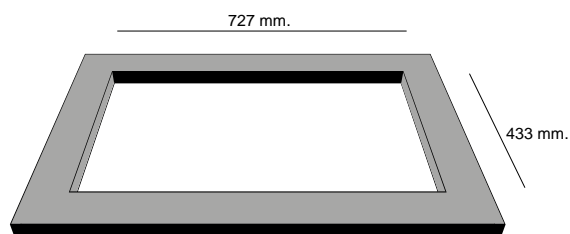

Base cabinet 80 cm.

Specifications

Roc_Stone
Antibacterial
Undermount
Inset



Packet in box
850 x 500 x 240 - 15 kg

Roc-Stone

As a result of the effort in R&D, Poalgi has developed a resin-based composite with a high percentage of highly resistant and durable mineral fillers that allows us to design our sinks without technical limitations and with a great surface finish.

Technical data	
Impact resistance	12 kgf/m ²
Resistance to compression	1595 kgf/m ²
Flexural strength	5110 MPA
Thermal resistance	130 °C
Barcol hardness	45


Resistance to marking	
With hydrochloric acid	Without changes
With detergents	Without changes
With anti-scale	Without changes
With ammonia	Moderate change

Each composition of the Gandia series includes valves, siphon, sealant, mounting sheet and inlay template.

Undercounter anchor bar included.

GANDIA Technical information

Colorstandard




BL-White



PG-Pergamon



NL-Black



MT-Metallic



AL-Albero



CT-Concret



TU-Tundra



BR-Brown

Small variations in the tones of the pieces are a peculiarity of products made with natural fillers and pigments and must be considered valid.

Colorplus

The Poalgi colorplus system adapts the color of your sink from the color of any surface (synthetic countertops, wooden countertops, ceramics, porcelain, compact) and/or universal chart color range RAL or NCS.

Declaration of conformity

Poalgi S.L. declares that the products they manufacture conform to annex ZA of the UNE-EN 13310:2003 kitchen sinks standard. Functional requirements and test methods.

Warranty certificates



Nº ES054125/14



UNE-EN 13310:2003



068/0550/09